



## Rex is the multi-frequency pipe & cable locator for all utilities

The sleek, ultralight design of the transmitter is less than 2" thick and weighs less than 4 lbs. At slightly over 7 lbs., the entire **Receiver/xmitter** system fits easily into a custom shoulder bag.




### Optimized for finding

- ▶ Water, sewer, and gas pipes
- ▶ Electric & telecomm cables



**3 FREQUENCIES ♦ 1 LOCATOR ♦ ALL UTILITIES**

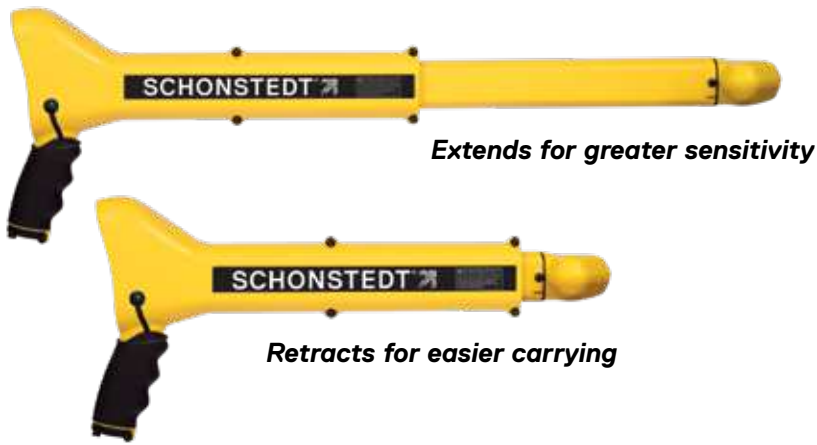

*Extends for greater sensitivity*

*Retracts for easier carrying*



### Receiver Specifications

<b>Operating Frequency:</b>	Active: 512 Hz, 33 kHz and 82 kHz; Passive: 50 or 60 Hz; Sonde: 512 Hz
<b>Battery:</b>	One 9V Battery
<b>Battery Life:</b>	12 Hours (intermittent usage)
<b>Weight (incl. battery):</b>	2.8 lbs (1.25 kg)
<b>Operating Temperature:</b>	-4°F to 140°F (-20°C to 70°C)
<b>Overall Dimensions:</b>	Closed: 17.5" (44 cm); Extended: 27.7" (70 cm)
<b>Max. Depth Capability:</b>	Approximately 19' (5.8 m)
	Sonde mode - approximately 5' - 15' (1.5 m to 4.2 m)
<b>Water and Dust Resistance:</b>	Rated IP54



*Slim, Sleek & Powerful Transmitter  
3.5 lbs and 1.75" thick*

### Transmitter Specifications

<b>Operating Frequency:</b>	512 Hz, 33 kHz and 82 kHz
<b>Operating Modes:</b>	Conductive, Inductive, and Inductive Clamp
<b>Max. Output Power:</b> (Conductive mode @ 1000 Ω load)	512 Hz and 33 kHz: 1/2, 1, 2 or 5 W 82 kHz: 1/2 or 1 W
<b>Battery Type:</b>	Rechargeable NiMH pack (12V)
<b>Battery Life:</b>	8 Hours (intermittent usage)
<b>Charging:</b>	Internal Smart Charger powered by AC/DC power adapter
<b>Dimensions:</b>	10"W x 10.25"D x 1.75" H (25.4 cm x 26 cm x 4.5 cm)
<b>Weight:</b>	3.5 lbs (1.6 kg)
<b>Operating Temp.:</b>	-4°F to 140°F (-20°C to 70°C)
<b>Water and Dust Resistance:</b>	Rated IP54



Copyright © 2021 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

**SCHONSTEDT**®   
from **RADIODETECTION**

**Contact Us:**

800-999-8280  
schonstedt.info@spx.com

**Find Your Local Dealer:**

schonstedt.com