

FlexiTrace™

Accessory for tracing non-conductive utilities



Compatible with a range of Schonstedt pipe & cable locators, FlexiTrace is a flexible, conductive rod with a sonde at the end.

When one transmitter lead is connected to FlexiTrace, the conductive rod can be used to trace non-metallic pipes. When both leads are connected, the end behaves like a sonde to help locate blockages.

- Rod diameter of 0.2" (5mm)
- Length of up to 263' (80m)
- Pinpoints the location of a blockage
- Traces the route of non-metallic pipes or conduits



FlexiTrace is used with a Schonstedt Pipe & Cable Locator to find and trace small diameter, non-metallic pipes and other non-conductive utilities. The entire length of FlexiTrace can be detected from above ground.

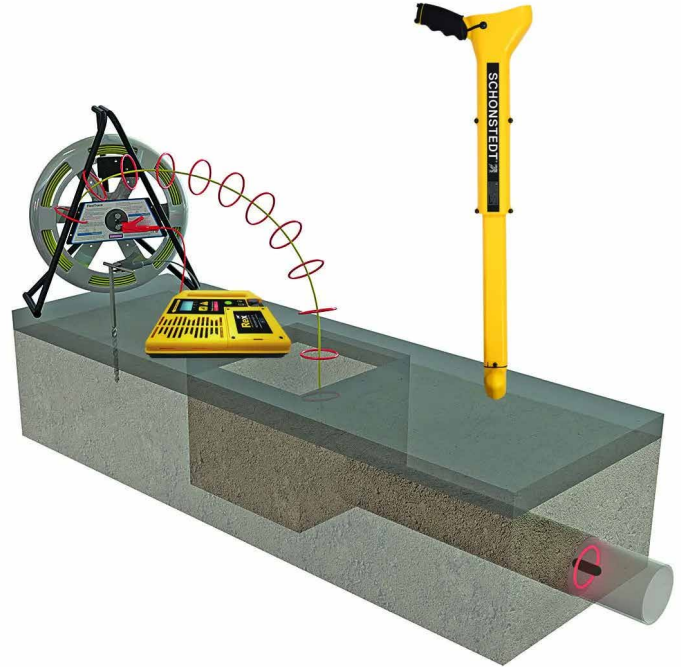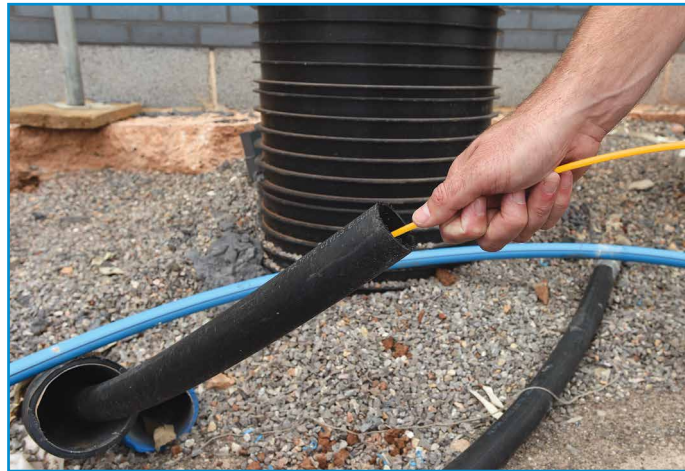

The FlexiTrace reel holds 164' (50m) or 262' (80m) of small diameter rod. The flexible rod can be energized by a transmitter and inserted into pipes as small as 0.5" (12mm).

FlexiTrace Specifications

| Length | Weight | Minimum Bend Radius | Rod Connection |
|------------|-----------------|---------------------|----------------|
| 164' (50m) | 13 lbs (6 kg) | 10" (250 mm) | Built in sonde |
| 263' (80m) | 14 lbs (6.5 kg) | 10" (250 mm) | Built in sonde |

FlexiTrace Frame size

| Rod diameter | Length | Width | Height |
|-----------------------|--------------|--------------|--------------|
| 0.2" (5mm) FlexiTrace | 33" (850 mm) | 21" (520 mm) | 37" (940 mm) |

Visit: www.schonstedt.com Follow us on:     

Schonstedt Instrument Company (USA)

100 Edmond Road, Kearneysville, WV 25430 USA

Toll Free: +1 800 999 8280 Tel: +1 304 725 1050 schonstedt.info@spx.com