

SOKKIA

MADE TO FIT YOUR WORLD.



Absolute Accuracy Inc
2451 Riverside Drive Los Angeles, CA 90039
phone: (800) 821-9656 or (323) 662-9237
web: www.aaisurvey.com email: info@aaisurvey.com

GRX3

GNSS Receiver



Positioning made easy

This fully integrated all-in-view constellation RTK GNSS receiver brings a new level of versatility and flexibility into your precision positioning applications. The GRX3 provides unmatched usability and versatility that's sure to enhance your productivity.

And like all Sokkia products, you can customize it to meet your needs and create your own workflows.

- Sokkia Tilt Technology
- L Band Ready Technology
- 226 Universal Tracking Channels™ covering all modernized signals (GPS, GLONASS, Galileo, BeiDou, IRNSS, QZSS, SBAS)
- Integrated 400MHz UHF and SiteComm™ Radios
- RTK and static survey operations
- Fusion Positioning™ technology automated workflow
- Standard RTK and Network RTK
- IP67 rated



Sokkia Tilt Technology

The Sokkia GRX3 incorporates a revolutionary 9-axis inertial measurement unit (IMU) and an ultra-compact 3-axis eCompass. This advanced technology compensates for mis-leveled field measurements out of plumb by as much as 15 degrees. Awkward shots on steep slopes or hard to reach spots are now a breeze with tilt technology.

Open Architecture

The GRX3 architecture is designed so that third parties can write their own applications.

All Constellation Support

Featuring 226 Universal Tracking Channels with Universal Tracking Technology, the GRX3 has you covered. With programmable channels for tracking available signals, the GRX3 supports all modernized signals.

Multiple Wireless Technologies

The most commonly used wireless technologies can be integrated into the GRX3 receiver. Digital UHF, Network RTK and SiteComm™.

Maximum Versatility


Utilizing full wireless connectivity and no voice feedback, the GRX3 enables the use of both RTK and network RTK technologies. It can be operated as both a private RTK base and RTK rover using the internal digital UHF.

Stay in Control

The GRX3 includes built-in internal Bluetooth® capability that allows you to choose your field controller model and software. Whether it is a small palm-sized screen device, a larger screen handheld, or even a field laptop, the GRX3 is ready to connect.

Ready for the field

The GRX3's magnesium alloy body can handle even the toughest job site conditions. It's compact, watertight, and rugged with IP67 rated dust and water protection.

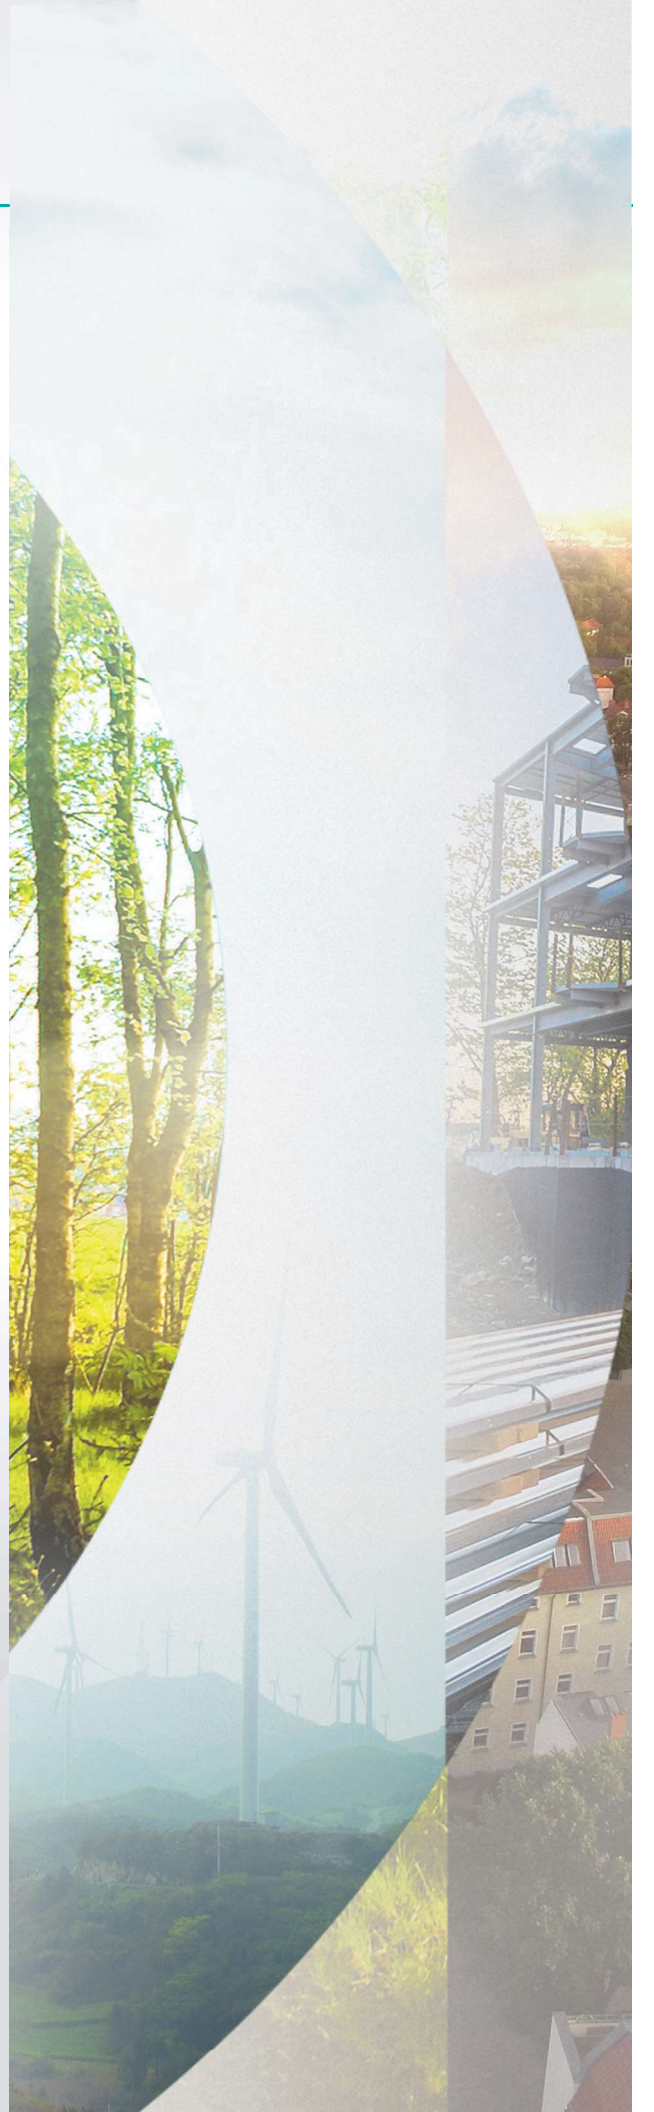

Specifications

GNSS Tracking	
Channel Count	226 with patented Universal Tracking Channels technology.
Signal	
GPS Signals	L1 C/A, L1C ¹ L2C, L2P(Y), L5 ¹ L1C when signal available.
GLONASS	L1 C/A, L1P, L2C/A, L2P, L3C ² ² L3C when signal available.
Galileo	E1/E5a/E5b/Alt-BOC
BeiDou/BDS	B1, B2
IRNSS	L5
SBAS	WAAS, EGNOS, MSAS, GAGAN (L1/L5) ³ L5 when signal available.
L-band	TopNET Global D & C Corrections services
QZSS	L1 C/A, L1C, L1-SAIF, L2C, L5
User Interface	
Operation	Single-button operation for power, receiver reset, memory initialization
Display panel	22 LED status indicators
Positioning Performance	
Static/ Fast Static	H: 3 mm + 0.4 ppm V: 5 mm + 0.5 ppm*
Precision Static	H: 3.0 mm + 0.1 ppm V: 3.5 mm + 0.4 ppm
RTK	H: 5 mm + 0.5 ppm V: 10 mm + 0.8 ppm
RTK, Tilt Compensated	H: 1.3 mm/°Tilt; Tilt ≤ 10° V: 1.8 mm/°Tilt; Tilt > 10° Maximum recommended angle for tilt compensation is 15°.***
DGPS	0.25 m HRMS
L-Band, D Corrections Service	H: < 0.1 m (95%) V: < 0.2 m (95%)
Operational Time	RX mode - 10hr TX mode 1W - 6hr <i>Use of external 12V battery is recommended when using GRX3 with internal radio in transmit mode.</i>
Internal Radios	425-470 MHz UHF radio Max Transmit Power: 1W Range: 5-7 km typical; 15 km in optimal conditions.***
Memory	Internal Non-removable 8 GB SDHC
Environmental	
Dust/Water Rating	IP67
Operating Temperature	-40°C to 65°C
Humidity	100%, condensing
Drop and Topples	1.0 m drop to concrete. 2.0 m pole drop to concrete.
Physical	
Dimensions	150 x 100 x 150 mm (w x h x d)
Weight	<1.15 kg

* Under nominal observing conditions and strict processing methods, including use of dual frequency GPS, precise ephemerides, calm ionospheric conditions, approved antenna calibration, unobstructed visibility above 10 degrees and an observation duration of at least 3 hours (dependent on baseline length).

** Subject to successful Tilt calibration and operating environment free of magnetic disturbances.

***Varies with terrain and operating conditions.

MAGNET® Software

This is the simplest, most effective software suite for the geomatics and survey professional.

MAGNET® Field

Welcome to the quickest and easiest way to collect and layout points in the field. MAGNET® Field's user friendly interface and simple but powerful controls help you work faster and more precisely.



- Graphical interface available on Windows® tablets
- Collect field measurements
- Control GNSS and robotic systems from Sokkia
- CAD in the field functionality
- Export point files to 3rd party software

MAGNET® Office

Process field measurement data from a variety of sensors in the same job file.

By combining data from multiple sensors, you get a more complete view of the project than you would with separate static files from each sensor.



- Process raw data from field measurements
- Work with total station, digital level, and GNSS receiver data
- GNSS post-processing
- 3D CAD view (optional module)
- Road design tools (optional module)

- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sokkia is under license. Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

SOKKIA

sokkia.com

Specifications subject to change without notice
©2023 Topcon Corporation. All rights reserved.
SOK-1048 RevC 5/23

Your local Authorized Dealer is: